


Platinum Metals | Platinum Pro II is a double-lock architectural standing seam system that provides a classical look that is supportive of more-rigorous wind-load designs required for many architectural projects. The 2" seam height enables the panel to be structurally sound yet architecturally appealing, and its heavy-gauge concealed fasteners allows for maximum thermal movement. The Platinum Pro II utilizes the proven seaming process of Pittsburgh Locking in conjunction with the floating capabilities of a concealed clip assembly. Virtually leak-proof with exceptional wind-uplift ratings, optional thermally-applied pre-assembly In-Seam sealant is available



**Warranty Included
with Purchase**

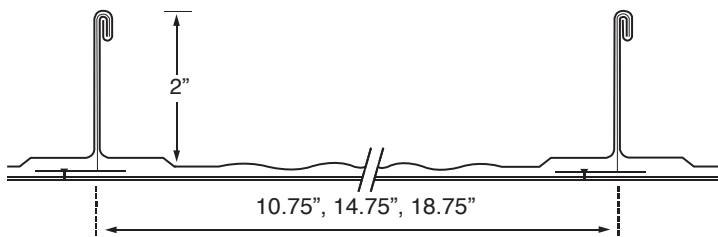

**Additional
Warranty Available**

General Use & Method of Application

Platinum Metals | Platinum Pro II panels must be installed in a sequential pattern. Application of a Platinum Metals approved underlayment prior to panel installation is recommended when installed over a solid substrate.

- Install in accordance with industry-recognized sheet metal practices.
- Cut, form, and fasten using conventional hand or power tools.
- For best results cutting tool edges should be kept sharp, clean, properly dressed, and closely aligned.
- Fabrication and erection can be accomplished with strippable plastic film in place. Film should be removed from areas of concealed or joined pieces.

Storage

Platinum Metals | Platinum Pro II metal panels should be stored in a well-ventilated, dry place where no moisture can contact them. Moisture (from rain, snow, condensation, etc.) trapped between layers of material may cause water stains or white rust, which can affect the service life of the material and will detract from its appearance. If outdoor storage cannot be avoided, protect the panels with a ventilated canvas or waterproof paper cover. Do not use plastic, which can cause condensation. Keep the material off the ground in an inclined position with an insulator such as wood. Protective film may degrade or become brittle with long-term exposure to direct sunlight.

Precautions

- Protective film may degrade or become brittle with exposure to direct sunlight. Therefore, it must be removed immediately.
- Product should not be used in areas of high abrasion or where it is subject to mechanical damage.
- Product is pre-finished material; care must be exercised during fabrication and erection to avoid surface damage.
- Platinum Metals recommends a minimum bend radius of 2T for .032 and .040 materials and a 3T bend radius for any material .050 or greater. Anything less than these minimum bend radii can cause crazing to the material.
- Attention should be paid to good house-keeping practices.
- Avoid dragging sheets over surfaces which may scratch or mar the finish.
- For general sheet metal use in building applications.
- Do not cut with power saws or abrasive blades.



Product Size

Panel Widths:	10.75", 14.75", 18.75", Custom
Seam Height:	2"
Minimum Panel Length:	36"
Maximum Panel Length:	50', Custom

Product Data

Minimum Slope:	1:12
Tapered Panels:	Yes
Radiused Panels:	No
Stiffening Ribs:	Optional
Striations:	Optional
Standard Panel Surface:	Smooth

Technical Information

Uplift Resistance:	UL 580 Class 90
Structural Performance:	ASTM E330 and E1592
Air Infiltration:	ASTM E283
Water Penetration:	ASTM E331, E1646 and E1680
Fire Rating:	UL Class A Rated Assemblies, UL 263 and UL 790
Hail Impact Rating:	Class 4, UL 2218
Florida Building Code:	TAS 125 (UL 90) Approved

Note: Testing is not applicable for all combinations of substrates, materials, and dimensions. All construction assemblies must be installed in accordance with the testing assembly.

Material & Thickness

Metal Specification

Available Finishes

Aluminum 0.032" (0.81 mm) 0.040" (1.02 mm)	Base Metal: Aluminum Thermal Expansion: 12.6 x 10 ⁻⁶ in/in/F° (22.2 m/m.K x 10 ⁻⁶)	Anodized Fluropon® Unpainted/Mill Finish
Galvanized Steel 26 ga. (0.48 mm) 24 ga. (0.64 mm) 22 ga. (0.75 mm)	Mod. Of Elasticity: 10.0 x 10 ³ x KSI (68.9 MPa) Base Metal: AISA-G90 Galvanized Steel Thermal Expansion: 06.7 x 10 ⁻⁶ in/in/F° (13.9 m/m.K x 10 ⁻⁶) Mod. Of Elasticity: 29.0 x 10 ⁶ x KSI (200 GPa)	G90- Clear Acrylic Coated Fluropon®
Galvalume® Steel 26 ga. (0.46 mm) 24 ga. (0.64 mm)	Base Metal: AZ50 Galvalume® Thermal Expansion: 06.7 x 10 ⁻⁶ in/in/F° (13.9 m/m.K x 10 ⁻⁶) Mod. Of Elasticity: 29.0 x 10 ⁶ x KSI (200 GPa)	Acrylume® Clear Acrylic Coated Fluropon®

For further information, please contact



**Platinum
Metals**

260.627.9060

This sheet is meant to highlight Platinum Metals products and specifications and is subject to change without notice. Platinum Metals takes responsibility for providing quality materials which meet published Platinum Metals product specifications. Neither Platinum Metals nor its representatives practice architecture. Platinum Metals offers no opinion on and expressly disclaims any responsibility for the soundness of any structure. Platinum Metals accepts no liability for structural failure of resultant damages. Consult a competent structural engineer prior to installation if the structural soundness or structural ability to properly support a planned installation is in question. No Platinum Metals representative is authorized to vary this disclaimer.